



## Interior Work






Special products for fixing chipboards and for fastening attachments in plasterboard, masonry or concrete

# At home in many trades

## Overview of our catalogues

Whether for professional applications on building facades or for anchoring solutions of technical facilities inside the building – EJOT offers the right fastening solution for every application.

Besides our comprehensive General Catalogue Building Fasteners, we offer you further catalogues on our business fields in addition to the individual catalogue Interior Work. Unlike the printed general catalogue, the individual catalogues are available exclusively in digital form.

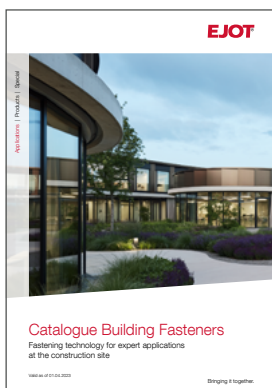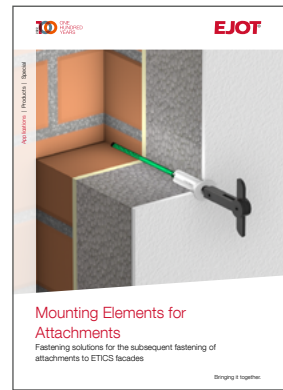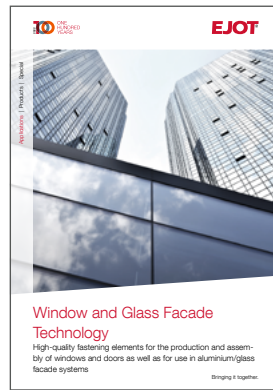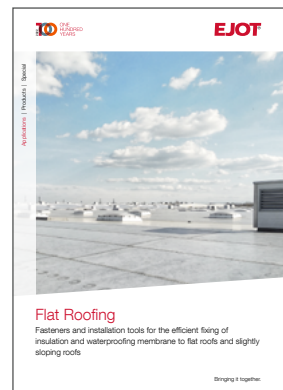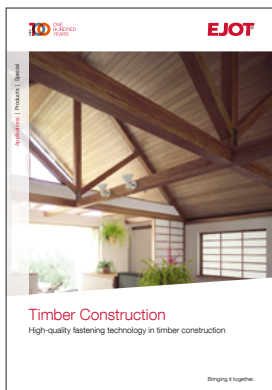

### General Catalogue Building Fasteners 2023/2024

You can find the current catalogue online as a PDF version.

You can find a digital overview of our catalogues here:



[www.ejot.com/catalogues](http://www.ejot.com/catalogues)

# Product overview

## EJOFAST®

### self-drilling screws

#### JF2 (steel)

JF2-2-4.2xL 4

### Ceiling nails

#### Steel

T-DN 6-35 5

### All wall plugs

#### Plastics

Gripper 6

### Spacers

#### Plastics

AS 7

### Fasteners for ceiling insulation

#### Insulation screw for direct

#### installation into concrete (steel)

DDS-7.3xL white 8

DDS-7.3xL beige 8

#### Ceiling insulation washer (steel)

DDT 70 mill finish 9

### Machinery

#### Cordless screwdrivers

ASCS 6.3 Select 11

#### Cordless hammer drills

ABH 18 Select 12

### Tools

#### Hammer drill SDS plus®

4-edge SDS-plus 13

#### Bit

Hexalobular TX 14

#### Socket wrench inserts

Hexagon clamping socket 15

## EJOFAST® self-drilling screw JF2-2-4.2

**EJOFAST**



### Application range

- > For the efficient fixing of steel air ducts


### Properties

- > Case-hardened steel, protected against corrosion
- > Reduced swarf fastening
- > No cleaning of the ventilation ducts from drilling chips
- > Non-skid application

### Applications



### Technical specifications



### Cross references

	page
Socket wrench insert SW7	15
Cordless screwdriver ASCS 6.3	11

### Certifications



### Product online



Order description	Length [mm]	Clamping thickness [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
JF2-2-4.2x13	13	0–5	1000		7381300609	4061245014227
JF2-2-4.2x16	16	0–8	1000		7381600609	4061245014210

## Ceiling nail



Cross references	page
Hammer drill SDS plus	13
Cordless hammer drill	12

## Application range

- > For use as a multiple fastener of non-supporting systems in concrete
- > Approved for concrete strengths from C20/25 to C50/60

## Properties

- > Steel, galvanized zinc-plated
- > High load-bearing capacity in cracked and non-cracked concrete
- > Small drill holes
- > Fast and reliable installation


## Characteristic values without fire exposure

Drill hole diameter $d_0$	6 mm
Drill hole depth $\geq h_1$	40 mm
Embedment depth $\geq h_{ef}$	32 mm
Min. component thickness $h_{min}$	80 mm
Edge distance $c_{min}$	150 mm
Centre distance $s_{min}$	200 mm
Max. attached part thickness $t_{fix}$	5 mm

## Applications



## Technical specifications



## Certifications



## Product online



Order description	Length [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
T-DN 6-35 ceiling nail	35	100		9700050035	4061245010236

## GRIPPER all wall plug



**Cross references** **page**

Hammer drill SDS plus®	13
Cordless screwdriver ASCS 6.3	11

**Application range**

- > For pre-positioned installation in boards, cavity and solid walls as well as in any other construction material

**Application examples**

- > Hand rails
- > Wall attachment of cabinets
- > Ceiling lights
- > Storage racks
- > Bookcases
- > Mounting televisions
- > Radiators
- > Wash basins
- > Urinals
- > Electrical installations
- > Attachment of HVAC and sanitary equipment
- > Attachment of sanitary equipment

**Properties**

- > Plug made of thermoplastic elastomer – the material adapts to the surface of the drill hole, while the non-slip GripEdge surface and the screws ensure secure mechanical embedment
- > GRIPPER surpasses normal plugs in its power of resistance against long-term stress, wear, weather conditions, moisture and storage
- > Can be used with all common types and diameters of screws
- > The special collar keeps the plug at the optimal installation depth and also remains covered by the screw head

Appropriate screws	Diameter [mm]	Length [mm]
GRIPPER 6	4- 5.5	32 + t <sub>fix</sub>
GRIPPER 8	4.5-6	38 + t <sub>fix</sub>
GRIPPER 10	4.5-7	45 + t <sub>fix</sub>





**Applications**



**Base materials**

- Suitable for
- > Aerated concrete block
  - > Plasterboard
  - > High-strength plasterboard
  - > Hollow light expanded clay aggregate block
  - > Pre-stressed hollow core slab
  - > Natural stone
  - > Non-cracked concrete
  - > vertically perforated brick
  - > Perforated sand-lime brick
  - > Solid clay brick
  - > Solid light expanded clay aggregate block
  - > Solid sand-lime brick

**Applications**



**Product online**



Order description	L [mm]	d <sub>0</sub> [mm]	h <sub>1</sub> ≥ [mm]	t <sub>sheet, min</sub> [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
Gripper 6 all wall plug	32	6	38	8	100		9650075232	4061245003146
Gripper 8 all wall plug	38	8	44	12	50		9650075234	4061245003139
Gripper 10 all wall plug	45	10	50	12	50		9650075236	4061245003122

## AS spacer




### Application range

- > To compensate for tolerances on wall and roof

### Properties

- > Plastics
- > All-purpose for anchor diameters of 6/8/10 mm
- > Easy installation through clipping-on from the side
- > Variable combinations

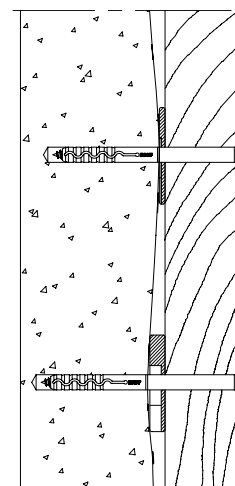

### Product online



Order description	Width [mm]	Height [mm]	Thickness [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
AS-3	50	50	3	100		8600725700	7612336001557
AS-5	50	50	5	100		8601189710	4039161005278
AS-8	50	50	8	100		8601233720	4039161005292
AS-10	50	50	10	100		8601232750	4039161005308
AS-15	50	50	15	100		8601187730	4039161005315



## Insulation screw for direct installation into concrete DDS



### Application range

- > For fastening ceiling insulation and acoustic insulation into concrete substrates
- > Particularly suitable for multi-layer boards with magnesite- or cement-bonded wood wool
- > Top layer with EPS or mineral wool core


### Properties

- > Easy installation: drill, fasten, done!
- > Small embedment depth
- > Injection-moulded screw heads with wood wool structure in beige or white for visually unobtrusive fastening

### Applications



### Technical specifications



### Cross references page

Ceiling insulation washer DDT	9
Bit hexalobular TX30	14
Cordless hammer drill	12
Hammer drill SDS plus®	13

### Product online



### Certifications



Order description	Length [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
<b>Colour white</b>					
EJOT DDS 7.3x75 white	75	100		8419075740	4039161005407
EJOT DDS 7.3x85 white	85	100		8419085740	4039161005414
EJOT DDS 7.3x100 white	100	100		8419100740	4039161005421
EJOT DDS 7.3x125 white	125	100		8419125740	4039161005438
EJOT DDS 7.3x150 white	150	100		8419150740	4039161005452
EJOT DDS 7.3x175 white	175	100		8419175740	4039161005469
<b>Colour beige</b>					
EJOT DDS 7.3x75 beige	75	100		8419075780	7612336177962
EJOT DDS 7.3x85 beige	85	100		8419085780	7612336177979
EJOT DDS 7.3x100 beige	100	100		8419100780	7612336177986
EJOT DDS 7.3x125 beige	125	100		8419125780	7612336001410
EJOT DDS 7.3x150 beige	150	100		8419150780	7612336177993
EJOT DDS 7.3x175 beige	175	100		8419175780	7612336178006

Further lengths on request





## Ceiling insulating washer DDT



### Application range

- > In combination with EJOT DDS insulation screw for direct assembly into concrete to increase the washer diameter for soft insulation materials

### Applications



### Cross references page

Insulation screw for direct installation into concrete DDS 8

### Technical specifications



### Product online



Order description	PU [pieces]	Price/100 [EUR]	Article number	EAN
EJOT DDT 70 mill finish	500		8721070700	4039161006978

# Machinery Spare Parts Tools

## Cordless screwdriver ASCS 6.3 Select



### Included in delivery

- 1 ASCS 6.3  
(without battery pack or battery charger)
- 1 plastic tool case
- 1 scaffolding anchor
- 1 depth stop
- 1 socket for hexagon screws SW8

### Application range

- > Torque-optimised cordless screwgun for fixing metal with screw diameters of up to 6.3 mm

### Properties

- > Path-oriented fastening through depth stop facilitates optimal fit of the sealing washers
- > Electronic torque shut-off for precise results even without depth stop
- > Maintenance-free, brushless motor with a very high degree of efficiency
- > Tested for over 500,000 single fixings
- > Over 1000 recharge cycles per battery pack
- > Extremely low weight
- > Optimum ergonomics with pistol handle for high contact pressure
- > Powerful up to 30 Nm

### Technical specifications

Battery voltage	18 V
Load speed	0–1500 rpm
Idle speed	0–1700 rpm
Max. torque (hard/soft)	30/10 Nm
Quick change chuck	1/4"
Screw	Ø 6.3 mm
Battery pack	not included in delivery

### 3-year FEIN PLUS

#### Warranty

including battery and charger  
(if registered online)

New: Tested for over 1 million  
single fixings

### Product online



Order description	PU [pieces]	Price/1 [EUR]	Article number	EAN
Cordless screwdriver ASCS 6.3 Select	1		9150200003	4014586881461
<b>Accessories</b>				
Depth stop sleeve	1		9150508100	4014586251318
Adapter for sealing washers ≤ Ø 16 mm	1		9150508016	4014586251288
Adapter for sealing washers ≤ Ø 22 mm	1		9150508022	4014586251295
Long screw support SH2 incl. socket holder, adapter and socket SW8	1		9150508111	4250483605087
Socket SW8 - 1/4" x 25	1		9150315000	4061245020976
Adapter for sealing washers ≤ Ø 22 mm	1		9151701029	4250483605094
Adapter for FZ sealing washers ≤ Ø 25 mm	1		9151701129	4250483605100

## Cordless hammer drill ABH 18 Select



### Included in delivery

- 1 ABH 18 Select  
(without battery pack or battery charger)
- 1 handle
- 1 depth stop
- 1 plastic tool case

### Application range

- > For drilling up to 20 mm in concrete Diameter

### Properties

- > Rapid work progress thanks to brushless motor with high impact energy
- > Fatigue-free working thanks to compact design and few vibrations
- > Protection for the user and tool by means of safety clutch and overload protection
- > Combination hammer with three functions: hammer drilling, drilling and chiselling
- > Brushless motor with 30% higher efficiency and long service life
- > 100 holes (10 x 75 mm) possible with one battery charge (6 Ah)
- > Setting of 68 mm socket holes with drill bit in masonry possible
- > The optional drilling dust nozzle means that little dust is produced
- > Low-vibration working at just 12 m/s<sup>2</sup>
- > FEIN SafetyCell technology. Protects the battery and tool from overload, overheating and total discharge
- > The battery charge can be read off the battery

### 3-year FEIN PLUS

#### Warranty

including battery and charger  
(if registered online)

### Technical specifications

Battery voltage	18 V
Motor	brushless
Idle speed	0–1200 rpm
Impacts	0–4400 rpm
impact energy	2.0 J
Tool holder	SDS-plus
Drill Ø concrete	20 mm
Drill Ø masonry	68 mm
Drill Ø steel	13 mm
Drill Ø timber	22 mm
Weight without battery	2.30 kg
Battery pack	not included in delivery

### Product online



Order description	PU [pieces]	Price/1 [EUR]	Article number	EAN
Cordless hammer drill ABH 18 Select	1		9150320000	4014586889214

## Hammer drill SDS plus®




### Application range

- > For masonry, concrete, natural stone, artificial stone etc.

### Benefits

- > Long service life
- > Centering point for easy, pinpoint drilling
- > Short spiral starts for optimized drill dust transport
- > Radially shaped reinforcement protection against hooking in case of reinforcement hits
- > 4x4 design allows precise concentricity and minimizes wear and friction losses
- > High-quality hardened and tempered steel for the toughest applications

### Technical specifications



### Product online




Order description	D [mm]	L1 [mm]	L2 [mm]	PU [pieces]	Price/1 [EUR]	Article number	EAN
<b>4 edges</b>							
4-edge SDS-plus 5x160	5.0	160	100	1		9270005160	4061245080208
4-edge SDS-plus 5x260	5.0	260	200	1		9270005060	4061245080314
4-edge SDS-plus 5x410	5.0	410	350	1		9270005350	4061245080239
4-edge SDS-plus 6x160	6.0	160	100	1		9270006160	4061245080253
4-edge SDS-plus 6x260	6.0	260	200	1		9270006260	4061245080277
4-edge SDS-plus 8x160	8.0	160	100	1		9270008160	4061245080284
4-edge SDS-plus 8x260	8.0	260	200	1		9270008260	4061245080307
4-edge SDS-plus 8x360	8.0	360	300	1		9270008360	4061245080338
4-edge SDS-plus 8x600	8.0	600	540	1		9270008600	4061245080369
4-edge SDS-plus 10x160	10.0	160	100	1		9270010160	4061245080376
4-edge SDS-plus 10x260	10.0	260	200	1		9270010260	4061245080390
4-edge SDS-plus 10x360	10.0	360	300	1		9270010360	4061245081137
4-edge SDS-plus 10x460	10.0	460	400	1		9270010460	4061245080406
4-edge SDS-plus 12x160	12.0	160	100	1		9270012160	4061245081144
4-edge SDS-plus 12x260	12.0	260	200	1		9270012260	4061245081151
4-edge SDS-plus 14x160	14.0	160	100	1		9270014160	4061245081175
4-edge SDS-plus 14x310	14.0	310	250	1		9270014310	4061245081267
4-edge SDS-plus 16x260	16.0	260	200	1		9270016260	4061245081212

Further lengths upon request



## Bit hexalobular TX



### Application range

> For fastening of all EJOT fasteners with drive hexalobular TX

### Technical specifications



### Product online



Order description	Drive and Size	Length [mm]	PU [pieces]	Price/1 [EUR]	Article number	EAN
<b>Drive: 1/4" hexagon DIN/ISO 1173 - E 6.3</b>						
TX20-1/4"/Cx25	TX20	25	1		9150010000	4050623100553
TX20W-1/4"/Cx25*	TX20W	25	1		9150008000	4050623100744
TX25-1/4"/Cx25	TX25	25	1		9150009000	4061245021072
TX25W-1/4"/Cx25*	TX25W	25	1		9150003000	4061245021102
TX30-1/4"/Cx25	TX30	25	1		9250431000	4050623100584
TX30W-1/4"/Cx25*	TX30W	25	1		9250431002	4050623100775
TX40-1/4"/Cx25	TX40	25	1		9250480000	4050623100591
<b>Drive: 1/4" hexagon DIN/ISO 1173 - E 6.3</b>						
TX25HF-1/4"/Ex50**	TX25	50	1		9506008401	4013288106926
TX30-1/4"/Ex50	TX30	50	1		9250431001	4050623102670
TX30-1/4"/Ex200	TX30	200	1		9253014200	4039161010975
TX30-1/4"/Ex350	TX30	350	1		9253014350	4061245021096
<b>Drive: threaded connection M 6</b>						
TX25-M6x33	TX25	33	1		9250251425	4061245021089
TX30-M6x33	TX30	33	1		9250251430	4050623103936

\* Special bit: conical design for force fit at screw head of painted screws

\*\*Bit with holding function for unpainted screws

## Socket wrench insert



### Application range

- > For fastening of all EJOT fasteners with hexagon head

### Properties

- > Clamping spring with ball
- > Secure fit of the screw

### Technical specifications



### Cross references

Cordless screwdriver ASCS 6.3 11

Order description	Drive and Size	Length [mm]	PU [pieces]	Price/1 [EUR]	Article number	EAN
<b>Drive: 1/4" hexagon DIN/ISO 1173 - E 6.3</b>						
K-SW7-1/4"x50 with ball and flat spiral spring	SW7	50	1		9250705106	4061245019987
K-SW8-1/4"x50 with ball and flat spiral spring	SW8	50	1		9250705104	4061245020006
K-SW3/8"-1/4"x50 with ball and flat spiral spring	SW3/8"	50	1		9250705105	4061245019994
K-SW10-1/4"x50 with ball and flat spiral spring	SW10	50	1		9250705102	4061245020020
K-SW13-1/4"x50 with ball and flat spiral spring	SW13	50	1		9250705103	4061245020013
S-SW17-1/4"x65	SW17	65	1		9250705107	4061245021119

### Product online






# Product and note charts

## Applications


### Interior Work

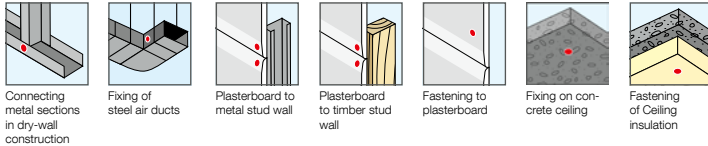

## Technical data | Certifications | Other

### Technical specifications


 1.0 + 1.0 Drilling capacity t <sub>1</sub> + t <sub>2</sub>	 1.0 Drilling capacity t <sub>1</sub>	 1.0 Drilling capacity t <sub>2</sub>	 max. 1,800 Installation rotation speed	 Screw with swarf-reducing point	 0 - 4 Clamping thickness screw	 16 Diameter Hexagon head	 7.5 Diameter Countersunk head	 12.0 Diameter Countersunk head with flange	 12.0 Diameter Pan head	 12.0 Diameter LT Pan head	 12.0 Diameter LT Pan head with cutting ring
 12.0 Diameter Truss head	 12.0 Diameter Cylinder head	 2.0 Height hexagon head	 13 Height LT pan head	 13 Height LT pan head with cutting ring	 13 Height truss head	 13 Height flat head	 4.8 Screw diameter with Hexagon head	 4.8 Screw diameter with countersunk head	 4.8 Screw diameter with STS countersunk head	 4.8 Screw diameter with pan head	 4.8 Screw diameter with LT pan head
 4.8 Screw diameter with LT pan head with cutting ring	 4.8 Screw diameter with truss head	 4.8 Screw diameter with flat head	 End mill	 Wing drill screw	 13 Flange head diameter	 5 Undercut	 6.3 High thread diameter	 5 Length non-threaded part Hexagon head screw	 13 Length non-threaded part LT pan head screw	 13 Length non-threaded part LT-Xt pan head screw	 9.5 Diameter rivet setting head
 1.5 Height rivet setting head	 2.7 Diameter riveting mandrel	 4.8 Diameter rivet shaft	 d <sub>h</sub> 4.9 Drill hole diameter rivet	 TX white Push-on cap	 XT Centring grommet	 13 Effective shaft length	 8.0 Flat roofing anchor diameter	 50 Flat roof stress plate diameter	 t <sub>fix</sub> 15 Clamp thickness metal anchor	 M12 Set screw diameter	 M8 Internal thread diameter
 10 Threaded sleeve external diameter	 8.0 Insulation support anchor shaft diameter	 90 Insulation support anchor washer diameter	 8.0 Nylon anchor diameter	 8.0 Metal anchor diameter	 T <sub>inst</sub> 60 Nm Tightening torque	 SDS plus® Drive SDS plus®	 4-edge Drill with 4-cutting edge geometry	 [Manufacturer] PGM Masonry Drill Bit Certification Board	 E16 Sealing washer size and material	 H2 Drive cross recess H	 H2 Drive external cross recess H
 Z2 Drive cross recess Z	 Z2 Drive external cross recess Z	 5 Drive internal square	 5 Drive external square	 Triangular Drive external triangular	 SW8 Drive external hexagon	 SW8 Drive internal hexagon	 SW13/TX40 Drive external hexagon/hexalobular	 TX25 Drive hexalobular	 TX25 Drive external hexalobular	 d <sub>nom</sub> 10 Nominal drill diameter	 d <sub>0</sub> 10 Drill hole diameter
 h <sub>1</sub> 10 Drill hole depth	 t 10 Drill hole depth	 h <sub>nom</sub> ≥ 70 Nominal embedment depth	 h <sub>e</sub> ≥ 50 Effective anchorage depth	 h <sub>e</sub> ≥ 70 Embedment depth	 d <sub>1</sub> 10 Through hole component I	 Slip resistance due to telescopic system	 Slip resistance through support	 ETB Checked fastening element acc. to ETB guideline	 RC2 Resistance class of burglar-resistant components	 Waterproof	 Protect from moisture

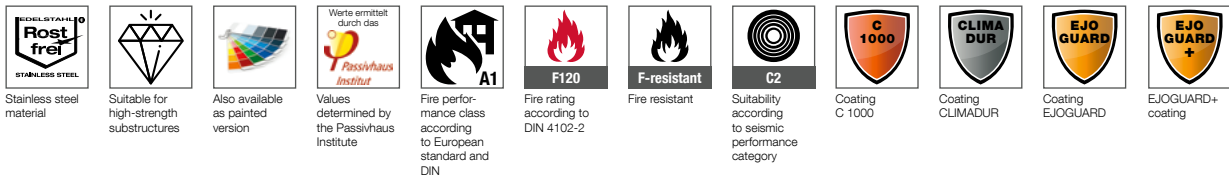



### Certifications



### Other



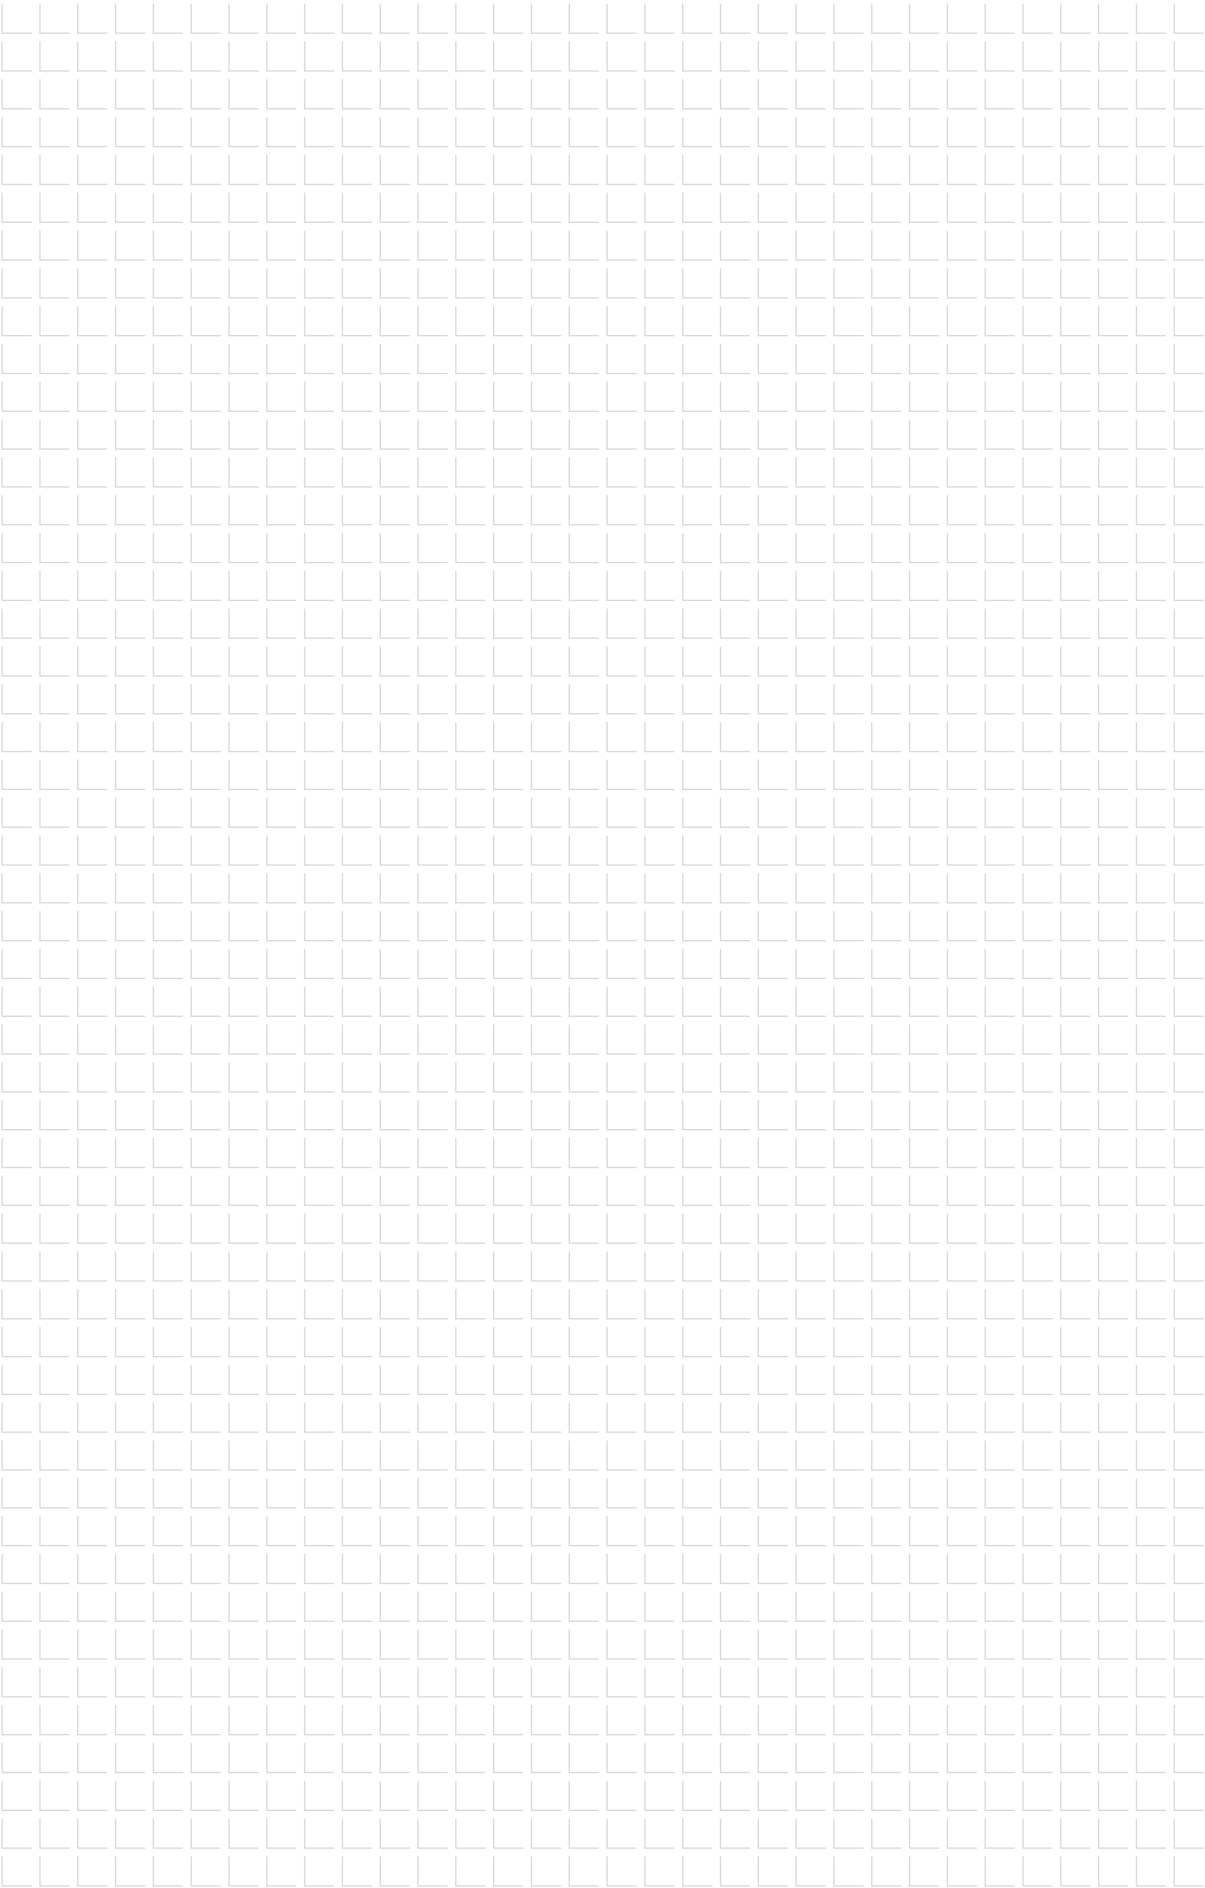

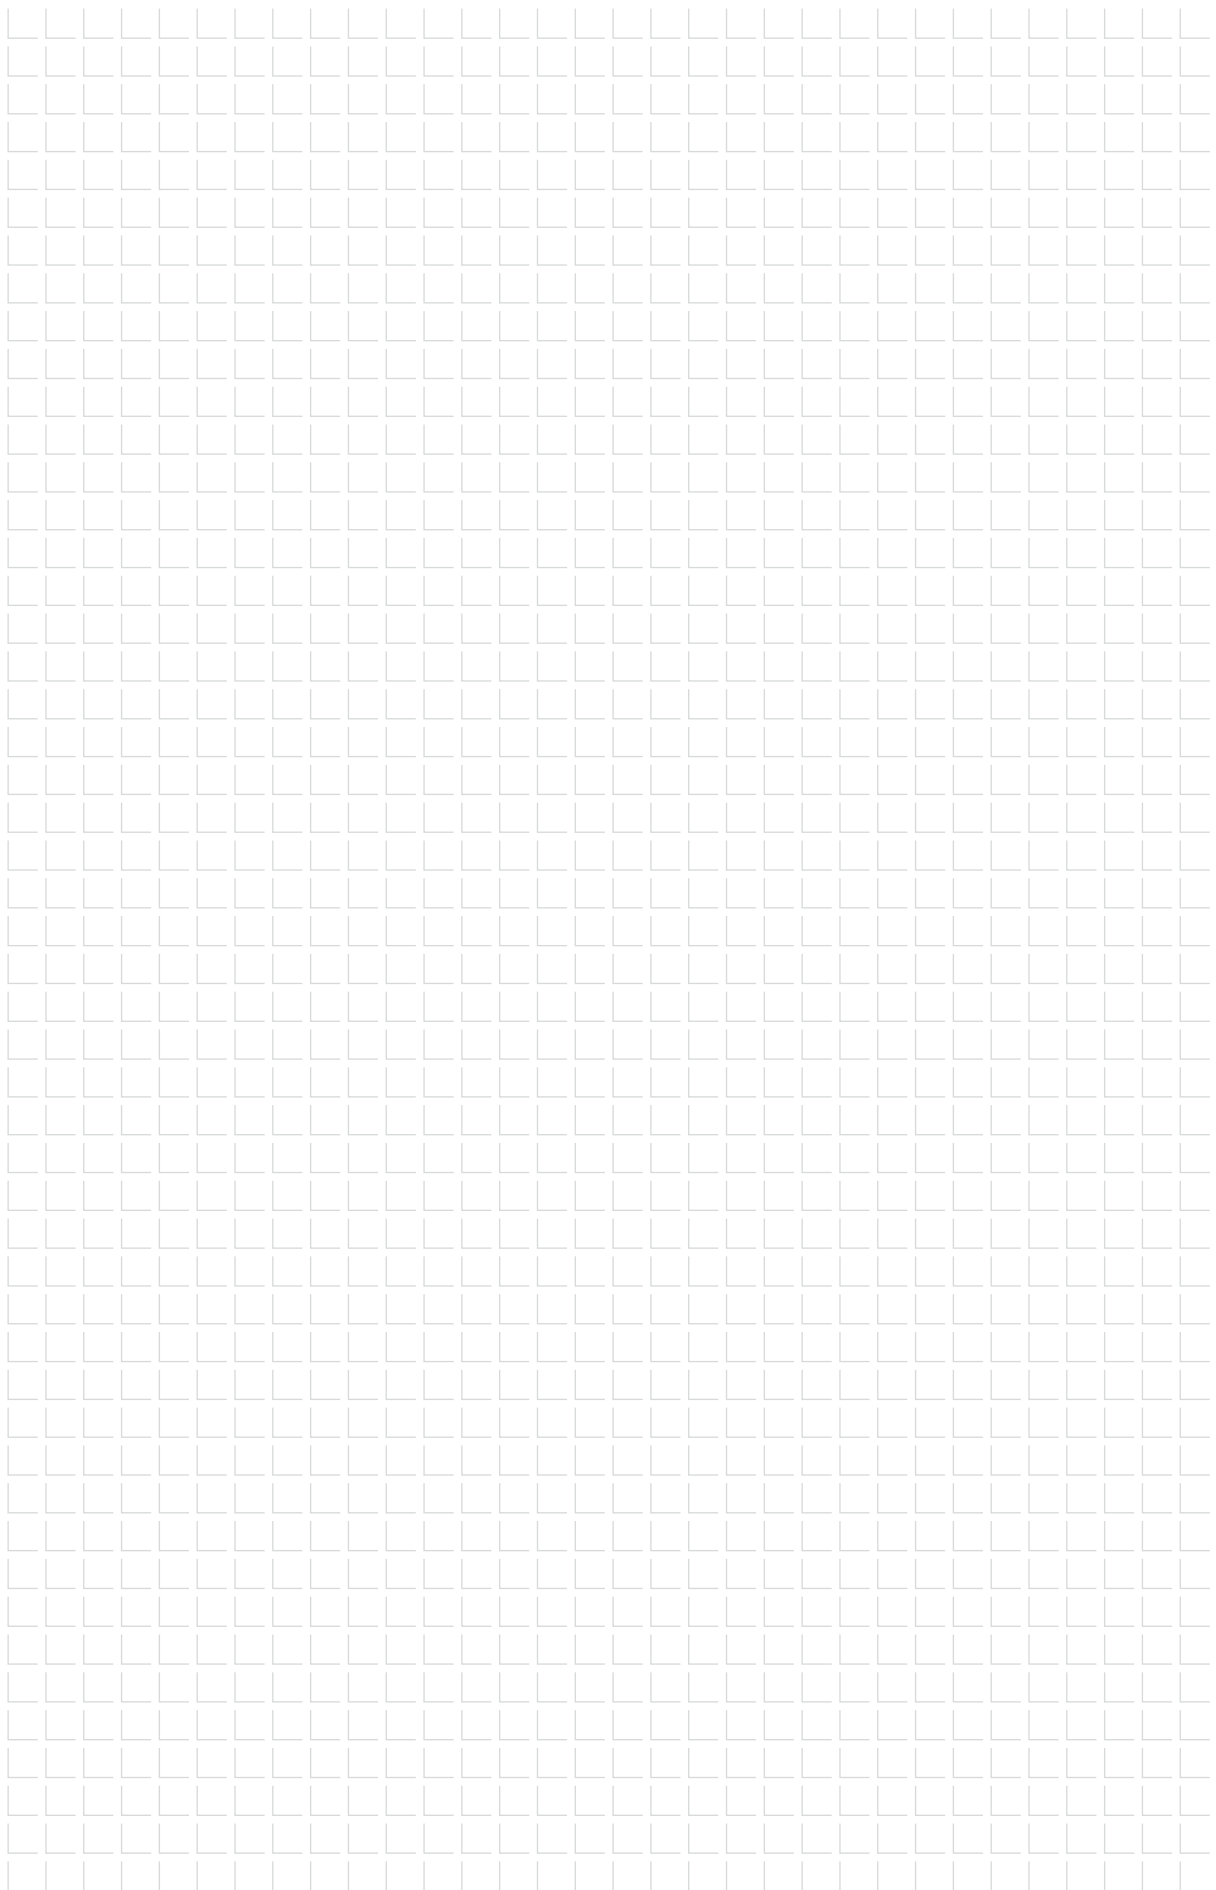

**EJOT SE & Co. KG**

**Market Unit Construction**

In der Stockwiese 35 · Germany

57334 Bad Laasphe

T +49 2752 908-0

F +49 2752 908-731

[construction@ejot.com](mailto:construction@ejot.com)

[www.ejot.com/construction](http://www.ejot.com/construction)